



WATER WELL CONSTRUCTION/REPAIR & PUMP REPAIR/REPLACEMENT APPLICATION & PERMIT

ENVIRONMENTAL MANAGEMENT DEPARTMENT (EMD) – ENVIRONMENTAL COMPLIANCE DIVISION
11080 WHITEROCK ROAD • SUITE 200 • RANCHO CORDOVA, CA 95670
TELEPHONE (916) 875-8400 FAX: (916) 875-8513 EMAIL: wells@saccounty.gov

WELL INSPECTION SCHEDULING LINE: (916) 875-8524

FOR OFFICE USE ONLY	DATE APPLICATION ACCEPTED: _____
EMD PERMIT NUMBER(S): _____	<small>(EXPIRES 1-YR FROM DATE OF APPROVAL)</small>

WELL APPLICATION

Well/Boring ID Number(s):	Property Owner Name:	Well Drilling Contractor:
Site Address:	Property Owner Address:	Contractor Mailing Address:
Nearest Major Cross Street(s):	Property Owner Phone Number:	Contractor Phone Number:
Parcel Number:	Property Owner E-mail:	Contractor E-mail:
GPS Coordinates (Decimal):	Site Contact:	Site Contact Phone:
		Contractor CSLB Lic#
		Expiration Date:

WELL TYPE: Domestic/Private Small Water System Municipal Agricultural/Irrigation Industrial

TYPE OF WORK: New Supply Well Pump Repair Pump Replacement / Install Rehab Well Repair Deepening Liner Install Vault Box Repair
(4910) (4965) (4965) (4965) (496R) (496R) (4912)

DRILLING METHOD: Cable Tool Mud Rotary Reverse Mud Rotary Air Rotary Auger Driven Other: _____

SEALING MATERIAL: Sand Cement (10.3 min.) Concrete (6 sack mix) Neat Cement Bentonite (Consult w/ Dept.)

CENTRALIZER PLACEMENT: Rotary drilling methods must identify the centralizers' interval placement (every # of feet) _____ (ft.)

PROPOSED SPECIFICATIONS (ATTACH WELL DIAGRAM AS NEEDED):

Conductor Borehole <i>(If applicable)</i>	Diameter (in.):	Total Depth of Well <i>(Borehole)</i>	Diameter (in.):	Multiple Completion/ Screened Intervals
	Depth (ft.):		Depth (ft.):	_____ (ft.) to _____ (ft.)
Conductor Casing <input type="checkbox"/> Permanent <small>(Annular seal required)</small> <input type="checkbox"/> Temporary	Diameter (in.):	Gravel Pack	Depth: _____ (ft.) to _____ (ft.)	and
	Depth (ft.):			_____ (ft.) to _____ (ft.)
Annular Seal <small>(The minimum is 50 ft. anchored in an impervious layer)</small>	Diameter (in.):	Foundation & Transition Seals	Specify Foundation or Transition Seal: <input type="checkbox"/> Retaining device or <input type="checkbox"/> Fine sand or <input type="checkbox"/> Bentonite Depth: _____ (ft.) to _____ (ft.)	and
	Depth (ft.):			_____ (ft.) to _____ (ft.)
Well Casing <input type="checkbox"/> Steel or <input type="checkbox"/> PVC (Shall meet ASTM std.)	Diameter (in.):	2nd Conductor Casing <i>(If applicable)</i>	Diameter (in.):	_____ (ft.) to _____ (ft.)
	Depth (ft.):			Depth (ft.):

Pump Contractor's Name:		Pump Contractor's License Number:	
Pump Type & Horsepower (Existing):	Pump Type (New):	Pump HP (New):	Pump's Estimated GPM (New):

Additional information:

APPLICANT INFORMATION

I understand and agree that all work associated with this permit is required to be done in accordance with Sacramento County Code Chapter 6.28 (Well Ordinance), California Department of Water Resources Well Standards, and the conditions of this permit. I understand that permitting and inspection time in excess of the original fee amount will be billed to the applicant - As authorized by SCC 6.99.180. I certify that the information given in this permit is correct to the best of my knowledge and that the signature below, whether original, electronic, or photocopied, is authorized and valid. Each page of this document has been reviewed and is complete and correct. I understand that it is my responsibility to notify the well owner of their responsibility to provide EMD with property access for a final well inspection. **An Authorization Letter is required if an Agent is submitting this application on behalf of the well owner or well driller.**

Applicant Name:	Applicant Signature:	Date:
Applicant Company Name:	Applicant Office Phone Number:	
Applicant Mailing Address:	Applicant Mobile Phone Number:	
	Applicant E-mail:	

Applicant is the: Well Contractor Property Owner Agent **(If NOT Property Owner or Well Driller, a signed Authorization Form is required)**

IMPORTANT: GIVE AT LEAST 24-HOUR NOTICE TO THE EMD WELL INSPECTION LINE WHEN SCHEDULING YOUR INSPECTION.

WELL SITE PLAN – TO BE COMPLETED BY APPLICANT

MINIMUM REQUIREMENTS

1. North arrow, parcel dimensions, and scale (1-inch = _____ feet)
2. **Minimum of two measurements (with right angles)** to the proposed well in feet (must be able to locate well using the site plan).
3. **Location of site features** including major buildings, landscaped areas, tank fields, existing wells, septic systems, easements, cross streets, etc.
4. Setback distances in feet to all existing wells, septic systems (**including all adjacent parcels w/in 150 feet of proposed well site**), and other potential pollution sources.
5. For some remote sites, include appropriate landmarks so that inspector can locate project site (e.g. access and driveway approach, mile post markers, equipment staging location).
6. **NOTE:** Incomplete site plans will delay permit processing.


Well Site Address: _____

Well's GPS Coordinates: _____

Well Permit Number: _____

Other Conditions (eg. Gated Community, locked gate, etc.): _____

EXAMPLE

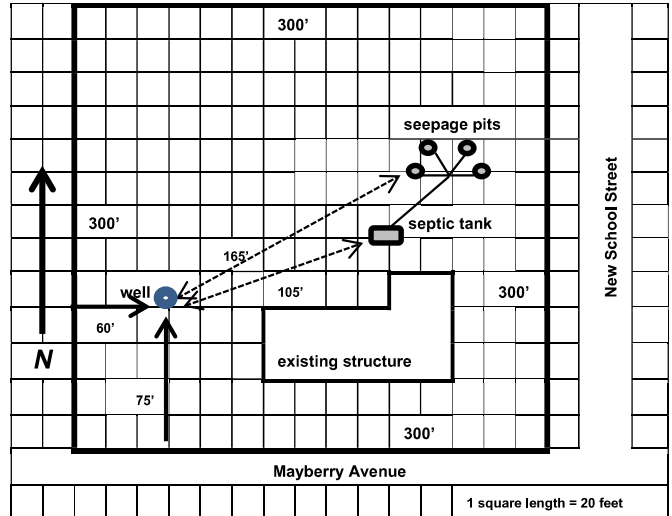

GENERAL WELL PERMIT REQUIREMENTS (SEE SACRAMENTO COUNTY CODE (SCC) CHAPTER 6.28 FOR DETAILED LOCAL WELL REQUIREMENTS)	
1	The annular seal's minimum borehole size must be at least 4 inches greater in diameter than the outside diameter of the well casing and any other pipe(s) in the borehole. This borehole will be drilled to the minimum annular seal depth [SCC 6.28.040(A)(2)(e)].
2	The minimum annular seal depth requirement is 50 feet below ground surface concurrently anchored in an impervious soil layer. At time of inspection, the applicant is required to provide a soil log demonstrating the annular seal is anchored in an impervious soil layer and to physically measure the annular seal depth [SCC 6.28.040(A)(2)(a)]. Deeper seals may be required in certain conditions, such as if the following setbacks are not met: A. 50 feet away from any sewer line, stream/ditch/drainage course, pond or lake, or public water supply well; B. 100 feet away from a septic tank, leach lines, deep leach trench; animal or fowl enclosure; and C. 150 feet away from a septic leaching pit or hazardous materials tank [SCC 6.28.040(A)(1)(a)].
2	EMD REQUIRED MINIMUM SEAL DEPTH: _____ (FOR EMD OFFICE USE ONLY).
3	An EMD inspection is required for sealing material placement. Contact (916) 875-8524 to request an inspection; a minimum of 24-hours notice is required [SCC 6.28.90].
4	EMD APPROVED ANNULAR SEALING MATERIALS Neat cement will be mixed at a ratio of one ninety-four (94) pound sack of Portland cement to 5 to 6 gallons of clean water. Additional water may be required where special additives, such as bentonite, accelerators, or retardants are used. Sand cement will be mixed at ratio of not more than one hundred eighty-eight (188) pounds of sand to one ninety-four (94) pound sack of Portland cement (2 parts sand to 1 part cement, by weight) and about 7 gallons of clean water. This is equivalent to a "10.3 sack mix." Less water shall be used if less sand than 2 parts sand per 1 part cement by weight is used. Additional water may be required when special additives, such as bentonite, accelerants, or retardants are used. Concrete will consist of Portland cement and aggregate mixed at a ratio of at least 6 ninety-four (94) pound sacks of Portland cement per cubic yard of aggregate. The size of the aggregate must be less than 1/5 th the radial thickness of the annular seal. Bentonite clay may only be used with prior EMD approval. Bentonite shall be commercially prepared, powdered, granular, pelletized or chipped sodium montmorillonite clay. The size of pellets or chips must be less than 1/5 th the radial thickness of the annular space. Bentonite slurries are not approved [SCC 6.28.040(A)(2)(d)]. EMD staff will reject any sealing materials during inspection that do not meet standard.
5	Transition seal materials can be up to 5 feet in length, consist of bentonite or fine sand, and must be placed in the annular space using a tremie device or equivalent to separate filter pack and cement-based sealing materials. If bentonite is used and the interval to be sealed is dry, water shall be added to the transition seal and allowed to set for at least 30 minutes before placement of cement-based sealing material [SCC 6.28.040(A)(2)(f)].
6	All casing material must meet the size and material standards listed in 6.28.040(A)(5).
7	Centralizers shall be equipped on the production casing to ensure the 2-inch minimum radial thickness of the annular space is maintained, unless otherwise approved by EMD [SCC 6.28.040(A)(2)(f)].
8	Temporary conductor casing shall be withdrawn as sealing material is placed between the well casing and borehole wall, be placed at least to the minimum annular seal depth, and kept at a sufficient height above the bottom of the temporary conductor casing as it is withdrawn. If a permanent conductor casing is installed, an oversized hole, at least 4 inches greater in diameter than the outside surface of the permanent conductor casing shall be drilled to the bottom of the conductor casing or to at least the minimum annular seal depth and the annular space between the conductor casing and the borehole wall shall be filled with sealing material. A welded cover shall be installed over the top in the space between the conductor casing and the well casing (see Bulletin 74-81, page 33, Figure 5B) [SCC 6.28.040(A)(2)(c)].
9	Proper Disposal of Drilling Fluids and Soil Cuttings. The applicant is required to see that safe and appropriate measures are taken in the handling and disposal of drilling fluids, soil cuttings, and other materials used or generated in connection with the permitted work. All drilling wastes must be controlled so as not to create conditions that violate applicable local, State and Federal regulations [SCC 6.28.030(E)(2)].
10	Mud pits created to confine drilling fluids shall be maintained during the well drilling operation so as not to be a nuisance. It shall be the applicant's responsibility to see that the mud pit is properly evacuated and backfilled upon completion of the job [SCC 6.28.030(E)(3)].
11	The well casing, vent, electrical box, and water storage tank must extend above ground surface or the base flood elevation, whichever is higher (private water well: at least 12 inches above; municipal water well: at least 18 inches above) [SCC 6.28.040(A)(3)]. MIN. CASING HEIGHT: _____ (FOR EMD OFFICE USE ONLY).
12	The base or pad shall extend at least two feet (24 inches) laterally in all directions from the outside of the well boring, unless otherwise approved by the Enforcement Agency. The base shall be a minimum of four inches thick. [SCC 6.28.040(A)(3)(a)(5)].
13	The well cannot encroach on any easement (information available through the County Assessor's Office) [SCC 6.28.030(A)(1)].
14	Gravel used in gravel-packed wells shall come from clean sources, be thoroughly washed before placement into the well, and disinfectants will be added to the gravel at a uniform rate [SCC 6.28.040(A)(4)].
15	This permit may be revoked if the well is not in compliance with regulatory standards. Permittee and well owner agree to construct, operate, and maintain the well according to all applicable requirements listed in the Sacramento County Code and the California State Department of Water Resources (DWR) Well Standards [SCC 6.28.120(C)].
16	This permit is only valid for approved well-related work listed on the application. Well construction methods (e.g. drilling methods, annular sealing material, well depth, etc.) authorized under this permit may not be changed except by written approval of an authorized EMD representative and only if EMD believes that such a change will result in equal or superior compliance with the County and DWR Well Standards (e.g. if the EMD representative finds that site conditions warrant such a change) [SCC 6.28.120(C)].
17	This permit is only valid for the Assessor's Parcel Number listed on the application [SCC 6.28.120(B)(2)].
18	The permittee will notify EMD within 5 days of well work completion [SCC 6.28.090(C)].
19	The applicant shall submit a Well Completion Report (WCR) to EMD within 60 days of work completion [SCC 6.28.110(A)].
20	Well owner required to provide property access to EMD for final inspection; well cannot be put into service until final inspection completed [SCC 6.28.090(C)].
21	Permittee shall maintain a copy of the permit at the work site during all stages of permitted activities [6.28.030(E)(5)].

SPECIAL PERMIT CONDITIONS <input type="checkbox"/> Yes <input type="checkbox"/> No - FOR EMD OFFICE USE ONLY	
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	

WELL PERMIT FORM – FOR EMD OFFICE USE ONLY			
PERMIT NUMBER(S): _____			
ACCOUNTING			
Date Received: _____	Total Fees: _____		
Account Number: _____	Invoice Number: _____		
APPLICATION APPROVAL:	Date: _____	By: _____	Comments: _____
INITIAL SITE INSPECTION:	Date: _____	By: _____	Comments: _____
ANNULAR SEAL INSPECTION:	Date: _____	By: _____	Comments: _____
	Depth to water: _____		Seal depth: _____
	Sealing material: _____		Seal anchored in impervious soil layer: _____
	Casing depth: _____		Total depth: _____
	Property owner provided verbal access approval for well final inspection: _____		
FINAL INSPECTION:	Date: _____	By: _____	Comments: _____
	Casing height above ground surface: _____		
	Standards/conditions met: _____		
	GPS Coordinates: N: 38. _____		W: -121. _____
WELL COMPLETION REPORT:	Date: _____		Comments: _____
COMMENTS:			

